

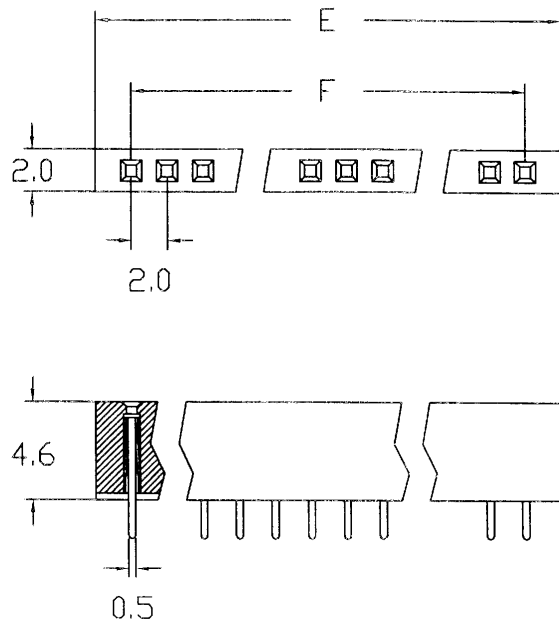


REVISION	DESCREPTION	DATE	APPD
0	SET UP	MAR/17/2000	C.Y.LIN

2254 - □

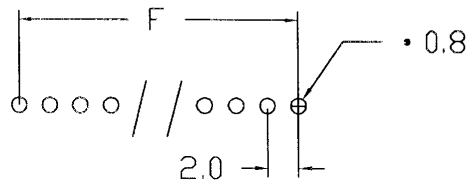

2254 - □ R

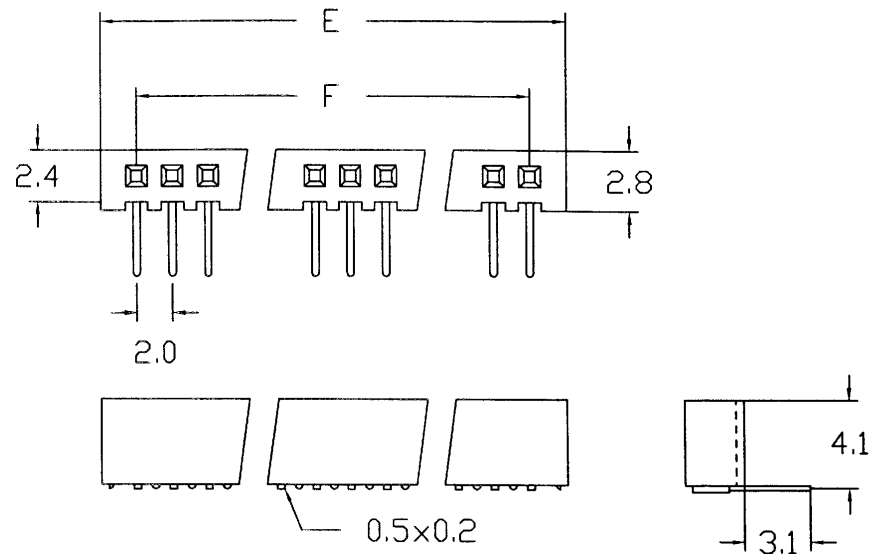

P.C. Board Layout

2254 - 1 x □ □ G

NO. OF CONTACT 2 ~ 40 pos

TYPE

Blanket: Straight

R=Right Angle

* Black color only

Plating: G: Gold,

MATERIAL & ELECTRICAL

INSULATOR : Nylon 6T UL 94-V0

CONTACT : Phosphor bronze

PLATING : Gold plated

CURRENT RATING : 1AMP

DIELECTRIC STRENGTH : AC 500V for 1 minutes

INSULATOR RESISTANCE : 5000M • Min. 500V DC

TEMPERATURE : -40 •C ~ 105 •C

Dimension (mm)	
Tolerance : 0.2 2 to 40 pos. avail. per row	
E	2.00 x No. of position per Row
F	2.00 x No. of position per Row - 2.00



HO CHIEN ENTERPRISE CO. LTD

TITLE :

0.078" SINGLE ROW PCB SOCKET STRIP

DR	RON CHEN	CHK	J.T.CHEN	APPD	C.Y.LIN	PAGE	1 OF 1	HO CHIEN PIN.	2254 SERIES
----	----------	-----	----------	------	---------	------	--------	---------------	-------------