
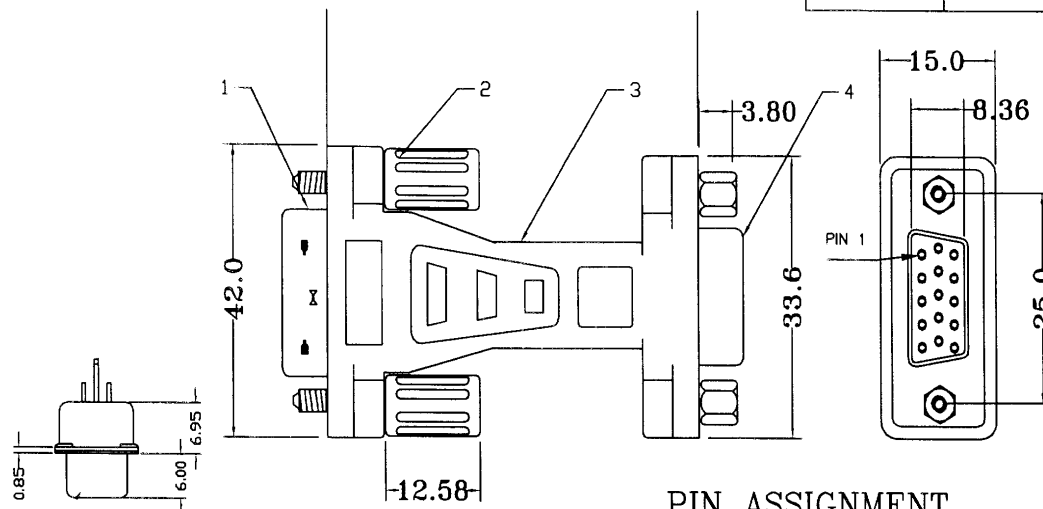
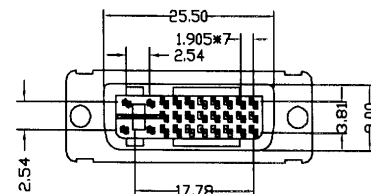
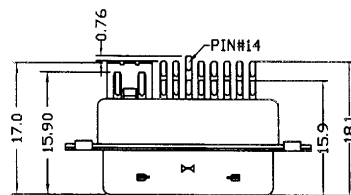


REVISION	DESCREPTION	DATE	APPD
0	SET UP	OCT/01/2002	C.Y.LIN

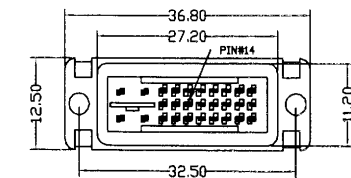

ELECTRONIC TEST:

- 1.OPEN/SHORT/INTERMITTE:100%.
- 2.INSULATION RESISTANCE:20M Ω
- 3.CONTACT RESISTANCE:1 Ω
- 4.HI--POT:400V OTAGE.

PIN ASSIGNMENT

VGA HDD15F

DVI-24+5 MALE

R6,G7,B8

13	_____	C5 ANLOG GND
3	_____	C4 HORI. SYNC
2	_____	C3 ANLOG
1	_____	C2 ANLOG
5,10	_____	C1 ANLOG
9	_____	15 GND(+5V&HV SYNC)
14	_____	14,16 POWER +5V
12	_____	8 VER. SYNC
15	_____	7 DDC DATA
SH	_____	6 DDC CLOCK
	_____	SH GROUND

4	HIGH DENSITY D-SUB 15P FEMALE SOLDER INSULATION:BLACK IN COLOR	PCS	1
3	PVC MOLDED COPPER FOIL BEIGE IN COLOR		
2	THUMB SCREW #4-40UNC BEIGE IN COLOR	PCS	2
1	DVI24+5(P) MALE SOLDER INSULATION:BLACK IN COLOR	PCS	1
NO.	DESCRIPTION	UNIT	QTY



HO CHIEN ENTERPRISE CO. LTD

TITLE :

VGA HDD15F to DVI-24+5 MALE

DR : RON CHEN	CHK : J.T.CHEN	APPD : C.Y.LIN	PAGE: 1 OF 1	HO CHIEN P/N. DVI-9700A
------------------	-------------------	-------------------	-----------------	----------------------------