

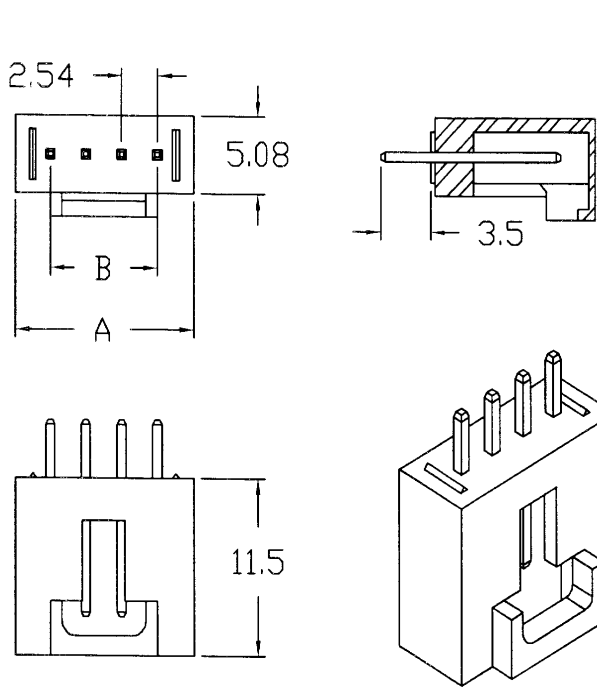


REVISION	DESCREPTION	DATE	APPD
0	SET UP	SEP/5/2002	C.Y.LIN

25100

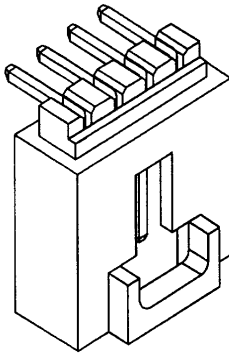

25110

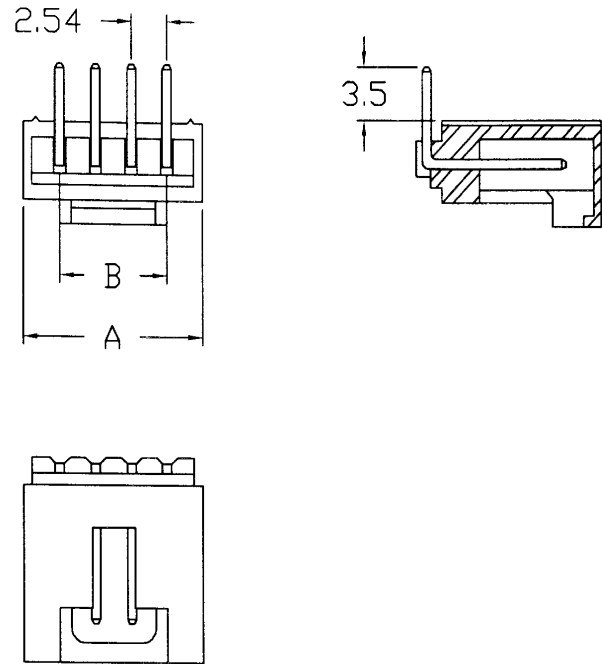

25100 & 25110 Dimension (mm)					
Tolerance : • 0.2					
Position	A	B	Position	A	B
2	7.62	2.54	11	30.48	25.40
3	10.16	5.08	12	33.02	27.94
4	12.70	7.62	13	35.56	30.48
5	15.24	10.16	14	38.10	33.02
6	17.78	12.70	15	40.64	35.56
7	20.32	15.24	16	43.18	38.10
8	22.86	17.78	17	45.72	40.64
9	25.40	20.32	18	48.26	43.18
10	27.94	22.86			

MATERIAL & ELECTRICAL
INSULATOR : PBT & Glass-fiber UL 94-V0
CONTACT : Brass
PLATING : Gold plaed or Tin plaed

25100 & 25110 - 

NO. OF CONTACT _____

2 ~ 18 pos

CONTACT PLATING _____

G=Gold plated

T=Tin plated

*Black color only

 HO CHIEN ENTERPRISE CO. LTD	
TITLE : 0.100" CENTER SHROUDED HEADER (W/LOCKING LATCH)	
PAGE : 1 OF 1	HO CHIEN P/N : 25100 & 25110 SERIES