
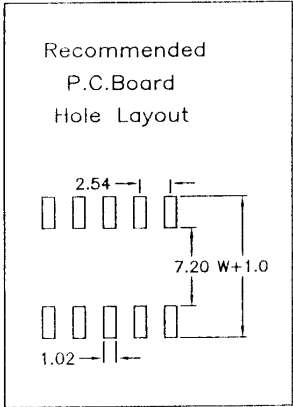

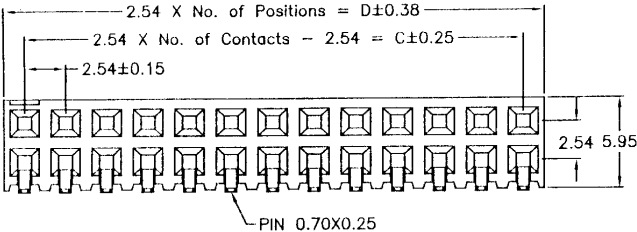
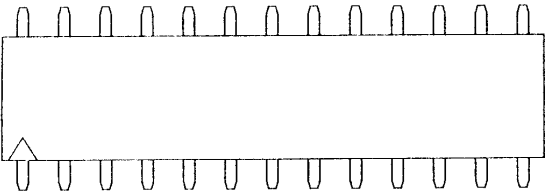


Specifications

Current Rating: 3 Ampere
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 600V AC
Contact Resistance: 20mΩ Max.
Operating Temperature: -40°C to +105°C

Materials

Contact Material: Copper Alloy
Contact Plating: Gold/Tin over Nickel
Insulator: Glass Filled Polyester (UL 94V-0)

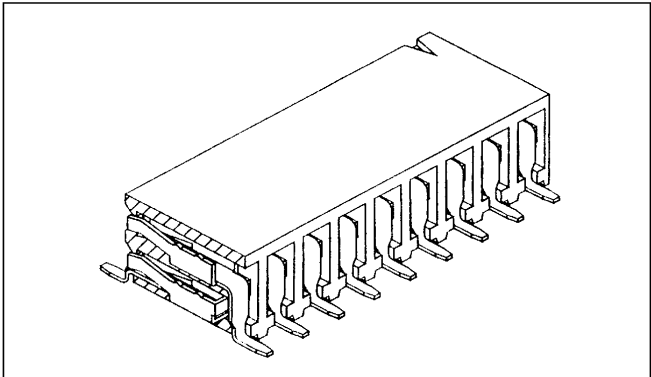

No. of Pins/Row			Dimension Information			No. of Pins/Row			Dimension Information			No. of Pins/Row			Dimension Information			No. of Pins/Row			Dimension Information		
			C	D					C	D					C	D					C	D	
02			2.54	5.08		13			30.48	33.02		24			58.42	60.96		35			86.36	88.90	
03			5.08	7.62		14			33.02	35.56		25			60.96	63.50		36			88.90	91.44	
04			7.62	10.16		15			35.56	38.10		26			63.50	66.04		37			91.44	93.98	
05			10.16	12.70		16			38.10	40.64		27			66.04	68.58		38			93.98	96.52	
06			12.70	15.24		17			40.64	43.18		28			68.58	71.12		39			96.52	99.06	
07			15.24	17.78		18			43.18	45.72		29			71.12	73.66		40			99.06	101.60	
08			17.78	20.32		19			45.72	48.26		30			73.66	76.20							
09			20.32	22.86		20			48.26	50.80		31			76.20	78.74							
10			22.86	25.40		21			50.80	53.34		32			78.74	81.28							
11			25.40	27.94		22			53.34	55.88		33			81.28	83.82							
12			27.94	30.48		23			55.88	58.42		34			83.82	86.36							

2600 - 2 X - - SMT
02 - 40 T : Tiin Plating
 G : Gold Plating
.....