

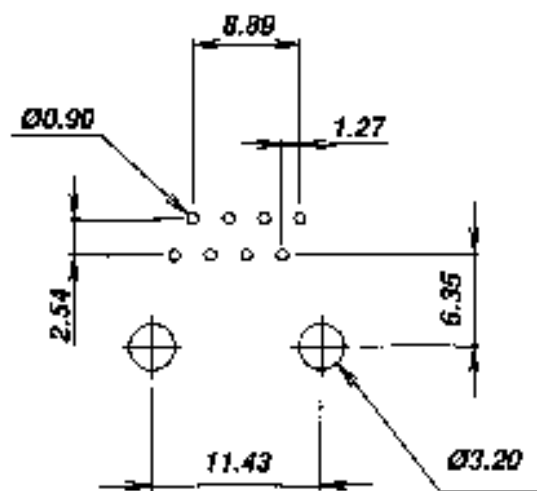
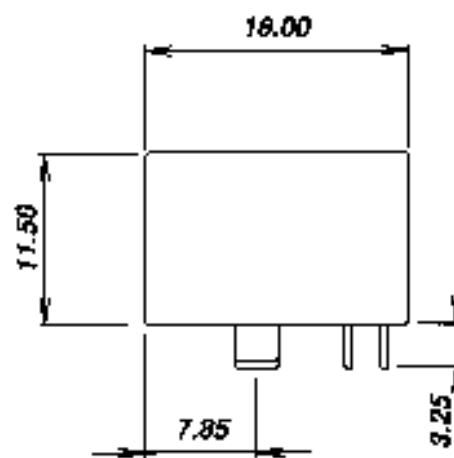


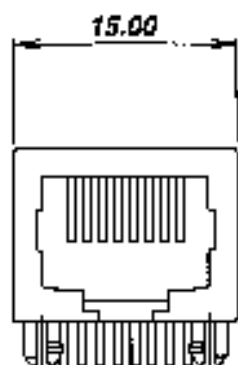

PCB LAYOUT



INSERT

SPECIFICATION :

1. Electrical Char.

Insulation Resistance : 500M-Ohm Min.
 Contact Resistance : 20milli-Ohm Max.
 Rating Current : 1.5A Max.
 Rating Voltage : 120V AC
 Dielectric Voltage : 1,000 RMS 50 Sec. Min.

2. Physical Char.

Housing : PBT Glass Filled (UL 94V-0)
 Color : Black Color
 Spring Wire : 0.45mm Dia. Phosphor Bronze
 Gold Plating Over Nickel
 Temperature Range : - 25 +90 C
 Durability : 500 Mating cycles Min.

HC-019-9-F-X

F=8p8c

Gold plated
 1=15u , 3=50u
 2=30u , 4= 5 u

HO CHIEN

www.hochien.com

TITLE

VERY LOW PROFILE SIDE ENTRY PCB JACK

UL & cUL FILE NO. E131820

MODULAR JACKS ASSY FOR

HC-019-9-F-X

SCALE SIZE DWG. NO. 9698 SERIES

DWG. NO.

AS019005

DO NOT SCALE DRAWING	TOLERANCES UNLESS OTHERWISE NOTED	INCH	MM	DR.	DATE
THIRD ANGLE PROJECTION	LINEAR	0.010, 0.005, 0.002	0.25, 0.13, 0.05	Steven	SEP-25 '03
	ANGLE	±0.30°		Johnn	SEP-25 '03
				Billy	SEP-25 '03