



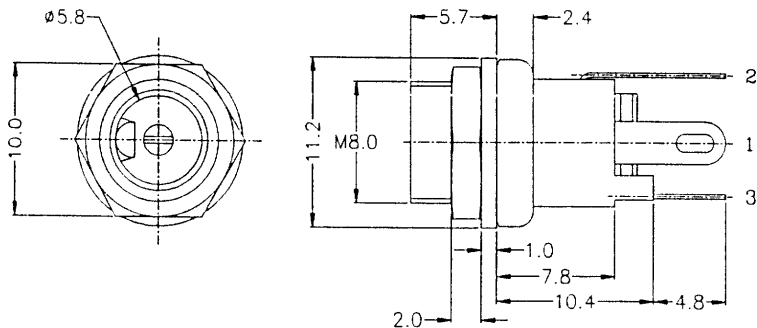

NOTE I

MATERIAL

Pin Contact:	Copper
Break Terminal:	Brass
Sleeve Spring:	Phosphor Bronze
Pin Terminal:	Brass
Contact Plating:	0.00381mm (.000150") Tin over .00127mm (.00005") nickel
Housing:	PBT and 15% Glass Fiber reinforced UL 94-V0



NOTE II

ELECTRICAL PERFORMANCE

Current Rating:	1 Amp
Dielectric Strength:	500V AC for one minute
Insulator resistance:	100 Megohms Min @ 500 DC
Contact resistance:	30 Milliohms Max

PART NUMBER
SCD-026

MATERIAL SEE NOTE I	DR	HO CHIEN ENTERPRISE CO. LTD.
	CHK	
ELECTRICAL PERFORMANCE SEE NOTE II	APPD	DC POWER JACK CENTER PIN DIA. 2mm
	APPD	