
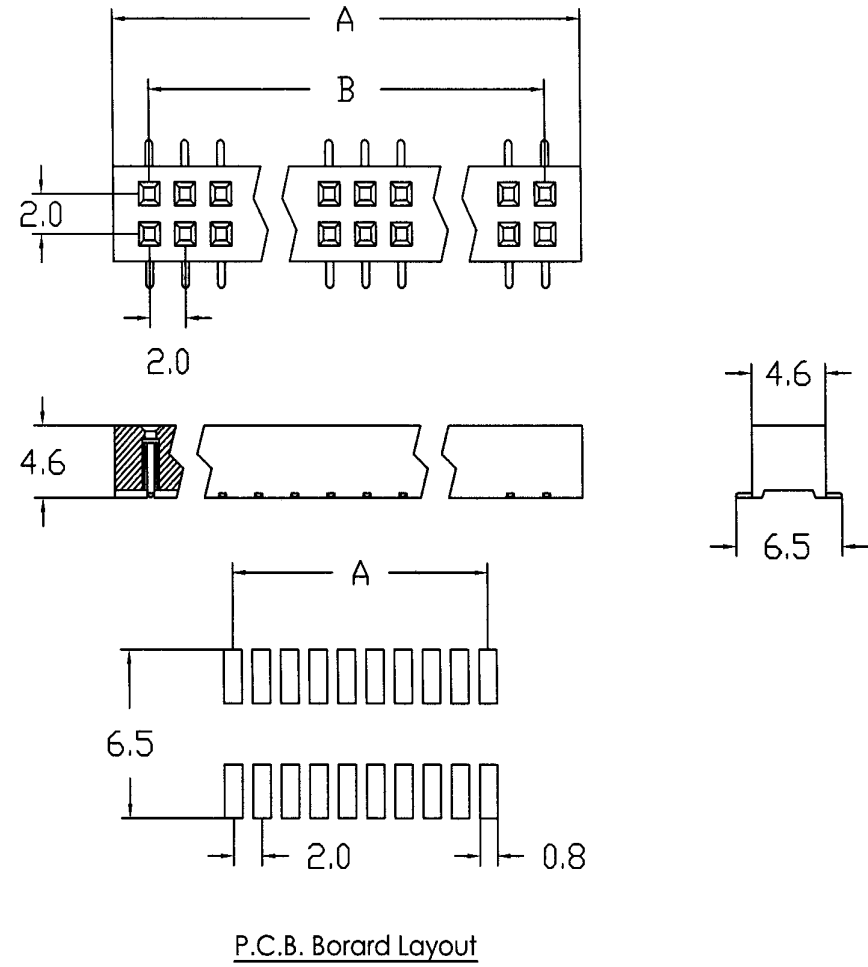


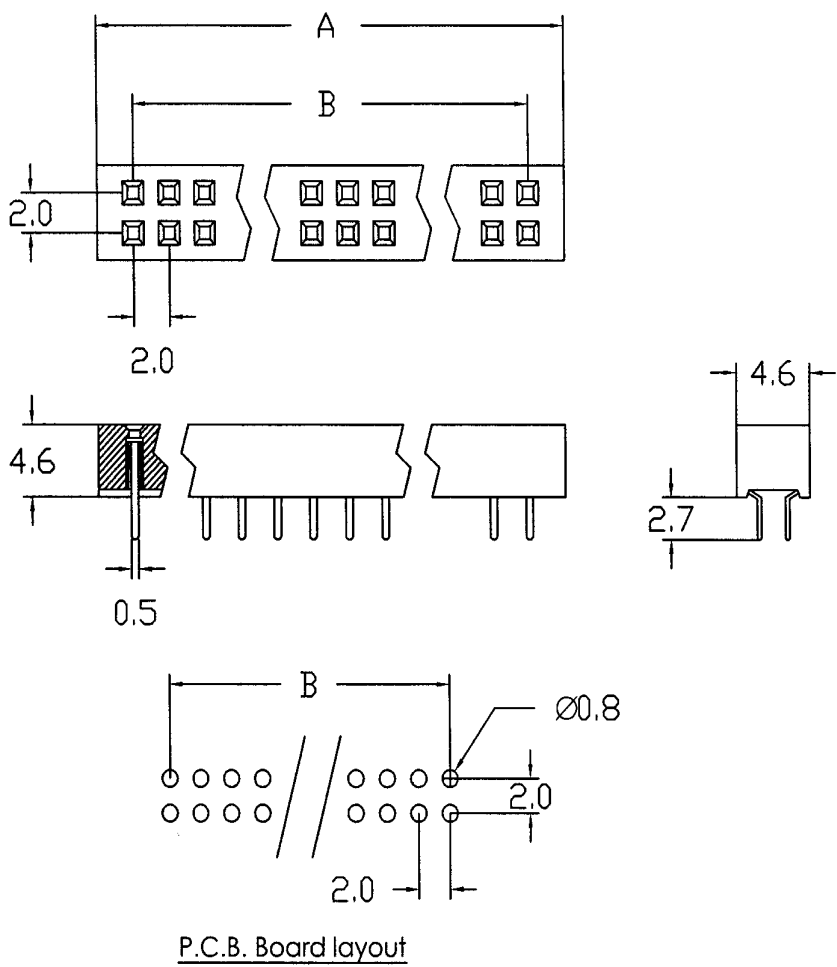

MATERIAL & ELECTRICAL
INSULATOR : Polyester UL 94-V0
CONTACT : Phosphor bronze
PLATING : Gold plated
CURRENT RATING : 1AMP
DIELECTRIC STRENGTH : AC 500V for 1 minutes
INSULATOR RESISANCE : 5000M.Ω Min. 500V DC
TEMPERATURE : -40℃ ~ 105℃

Dimension (mm) Tolerance : ± 0.2 2 to 40 pos. avail. per row	
A	2.00 x No. of position per Row
B	2.00 x No. of position per Row - 2.00

2252 - 2 x □
NO. OF CONTACT 2 ~ 40 pos
TYPE Blank=Straight
SMT=S.M.T.
* Black color only

**HO CHIEN ENTERPRISE CO. LTD**

TITLE : 0.079" (2.00mm) P.C.B. SOCKET

PAGE: 1 OF 1

HO CHIEN PIN NO. 2252