

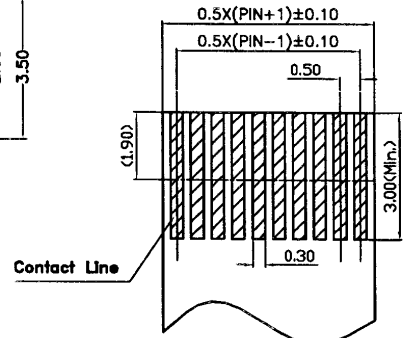




PCB Layout Reference

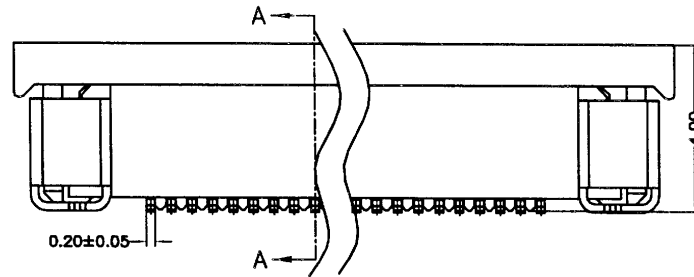

Thickness: 0.30±0.05
FPC Dimension Reference

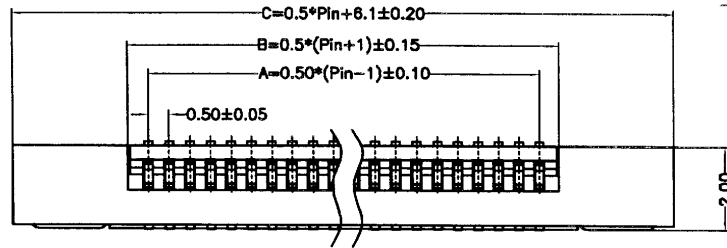

Section: A-A

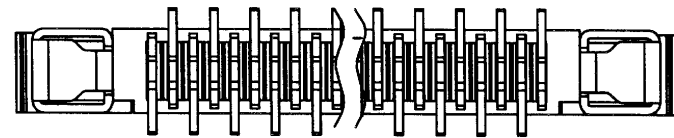

Specifications:

Current Rating: 0.4 A

Voltage Rating: 50V DC

Contact Resistance: 30m Max

Insulator Resistance: 50M Min

Operating Temperature Range: -55°C ~ +85°C

Material:

Contact Material: Phosphor Bronze

Plastic Material: Nylon 6T UL94V-0

Plating: Tin Plating

How To Order

1226-XX-01

Top Entry Contact Type

No Of Positions

Contacts Dimension:

No. Of Pin	Dim.A	Dim.B	Dim.C	No. Of Pin	Dim.A	Dim.B	Dim.C	No. Of Pin	Dim.A	Dim.B	Dim.C
4	1.50	2.30	8.10	20	9.50	10.30	16.10	36	17.50	18.30	24.10
5	2.00	2.80	8.60	21	10.00	10.80	16.60	37	18.00	18.80	24.60
6	2.50	3.30	9.10	22	10.50	11.30	17.10	38	18.50	19.30	25.10
7	3.00	3.80	9.60	23	11.00	11.80	17.60	39	19.00	19.80	25.60
8	3.50	4.30	10.10	24	11.50	12.30	18.10	40	19.50	20.30	26.10
9	4.00	4.80	10.60	25	12.00	12.80	18.60	41	20.00	20.80	26.60
10	4.50	5.30	11.10	26	12.50	13.30	19.10	42	20.50	21.30	27.10
11	5.00	5.80	11.60	27	13.00	13.80	19.60	43	21.00	21.80	27.60
12	5.50	6.30	12.10	28	13.50	14.30	20.10	44	21.50	22.30	28.10
13	6.00	6.80	12.60	29	14.00	14.80	20.60	45	22.00	22.80	28.60
14	6.50	7.30	13.10	30	14.50	15.30	21.10	46	22.50	23.30	29.10
15	7.00	7.80	13.60	31	15.00	15.80	21.60	47	23.00	23.80	29.60
16	7.50	8.30	14.10	32	15.50	16.30	22.10	48	23.50	24.30	30.10
17	8.00	8.80	14.60	33	16.00	16.80	22.60	49	24.00	24.80	30.60
18	8.50	9.30	15.10	34	16.50	17.30	23.10	50	24.50	25.30	31.10
19	9.00	9.80	15.60	35	17.00	17.80	23.60				

DRAWN:

Jeremy Liu

CHECKED:

Jerry Chen

APPROVAL:

Mike Wu

GENERAL TOLERANCE:

.X=±0.2

.XX=±0.15

UNIT: MM

SCALE: 20:1

SHEET: 1 / 1

PROJECTION:



HO CHIEN

www.hochien.com

DESCRIPTION:

0.5mm FPC Connector

PART NO:

1226-XX-01

SIZE

A4

E			
D			
C			
B			
A	Jul-09-2004	New Mold	Jeremy Liu
REV	DATE	FILE	BY