
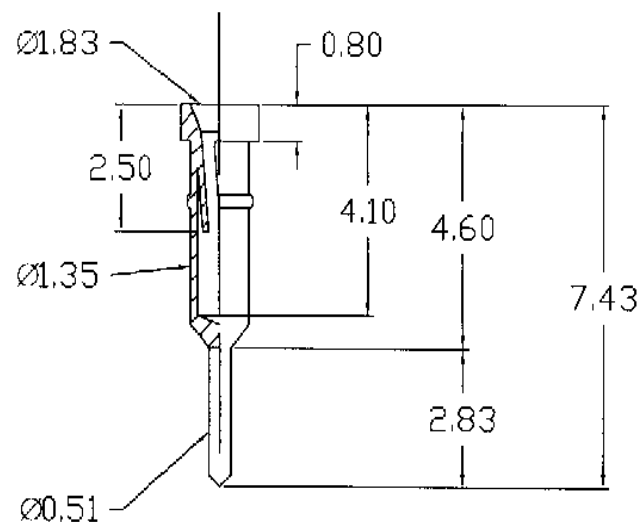
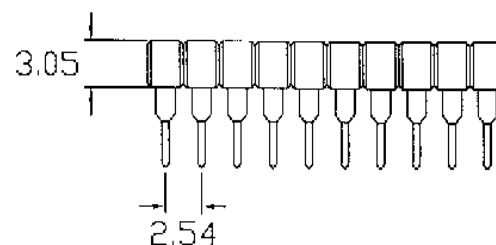
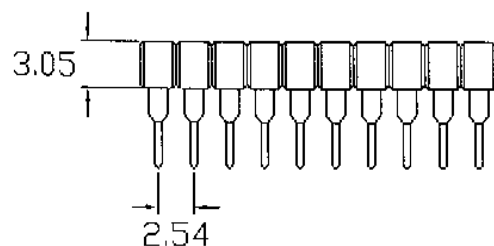
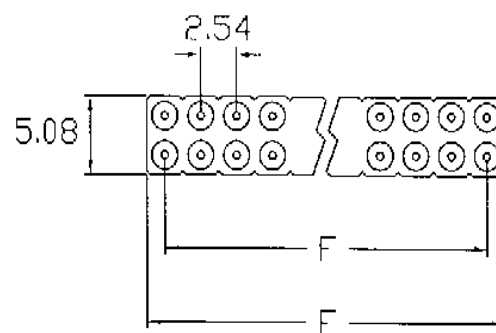


2558 - 1 x

2558 - 2 x

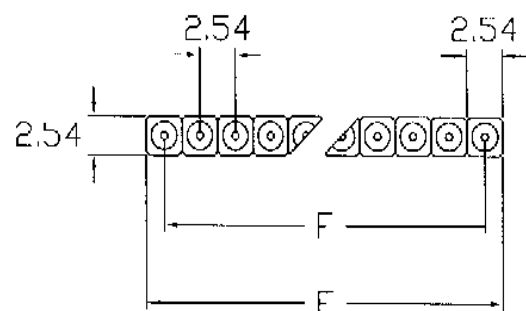

TYPE

1=Single Row

2=Double Row

NO. OF CONTACT

2 ~ 40 pos

* Black color only

2558 - 1 x

Dimension (mm)		2 to 40 pos. avail. per row
Tolerance : ± 0.2		
E	2.54 x No. of position per Row	
F	2.54 x No. of position per Row - 2.54	

MATERIAL & ELECTRICAL

INSULATOR : PBI 30% & Glass-fiber UL 94-V0

CONTACT : Phosphor bronze

PLATING : Tin plated

CURRENT RATING : 1 A

CONTACT RESISTANCE : 30m Ω max.INSULATOR RESISTANCE : 1000M Ω min.

OPERATING TEMPERATURE : -55°C ~ 105°C



HO CHIEN ENTERPRISE CO., LTD

TITLE : 0.1" (2.54mm) I.C. SOCKET STRIPS
WITH MACHINED PINS

PAGE : 1 OF 1

HO CHIEN P/N
2558 - 1 x & 2558 - 2 x

DR : RON CHEN

CHK : J.T.CHEN

APPD : C.Y.LIN