
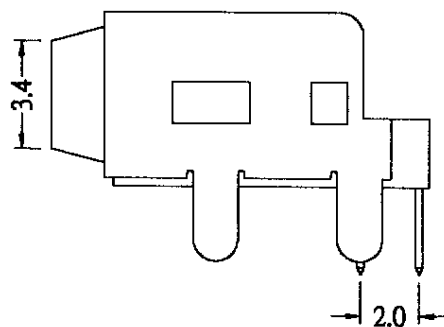
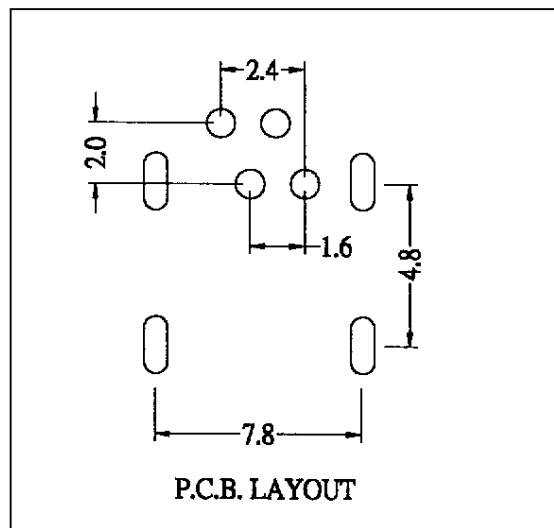



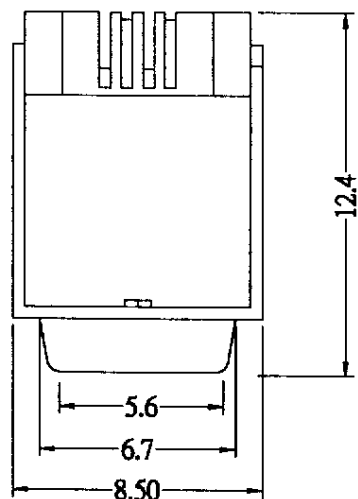

ELECTRICAL CHARACTERISTICS:

CONTACT CURRENT RATING: 1 AMPERES.

DIELECTRIC WITHSTANDING VOLTAGE: AC 500V R.M.S

INSULATION RESISTANCE: 500 MEGOHMS MINIMUM AT DC 500V.

CONTACT RESISTANCE: 30 MILLIOHMS MAXIMUM.

OPERATING TEMPERATURE: -55C TO 105C.

MECHANICAL CHARACTERISTICS:

CONTACT INSERTION FORCE: KG MAXIMUM.

CONTACT SEPARATION FORCE: KG MINIMUM.

MATERIALS:

CONTACT: PHOSPHOR BRONZE.

INSULATOR: NYLON 6T.

SHELL: BRASS.

FINISHES:

CONTACTS: GOLD PLATED 5U".10U".15U".30U".

SHELL: TIN PLATED.

HC CHIEN ENTERPRISES CO LTD.

PART NAME		IEEE-1394 4P FEMALE RIGHT ANGLE			
DWG.NO.	12394-04	SCALE	4:1	DATE	2001.03.06
CHECK	<i>Kent</i>	UNIT	mm	NAME	<i>Nick</i>