

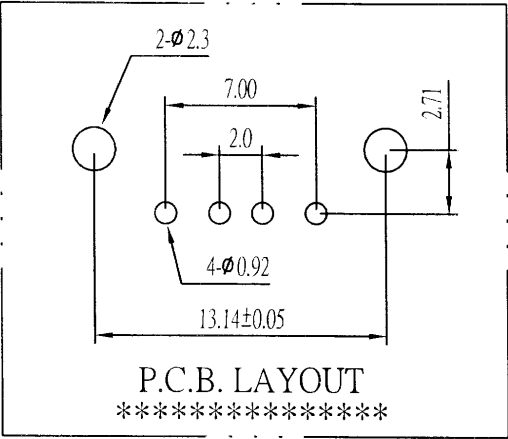
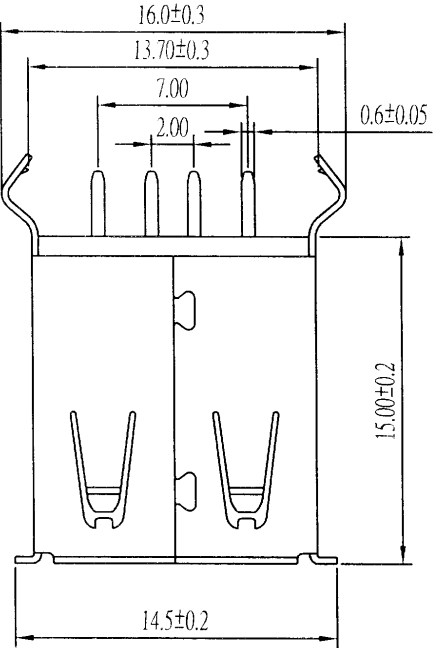


REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

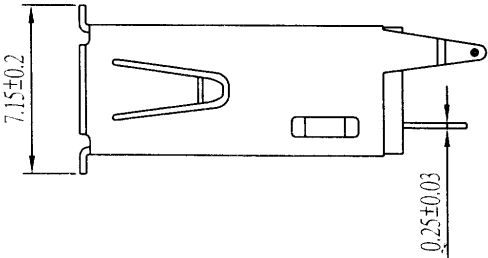

- Note:
- Material:
 - Insulator: High temperature thermoplastic with g.f,UL94v-0
 - Contact: Copper alloy,t=0.25mm
 - Shell: Brass,t=0.30mm
 - Specification:
 - Current rating: 1 A Max.
 - Dielectric withstanding voltage: 750 V(ac) for 1 min.
 - Contact resistance: 30 mΩ Max.
 - Insulation resistance: 1000 MΩ Min.
 - Total mating force: 4.0 Kgf Max.
 - Total unmating force: 1.0 Kgf Min.
 - Temperature range: -55°C~85°C

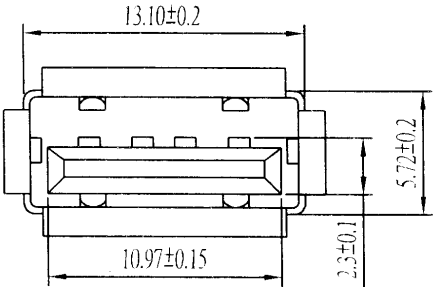

8				
7	shell			Nickel
6	Clip			
5	Contact			Selective Au plated on mating area
4	Contact			
3	Contact			
2	Contact			
1	Housing			white
No.	Name	Q'ty	Part No.	Finish

PART NO:		MATERIAL:		HO CHIEN www.hochien.com	
MODEL NO:		FINSH:			
UNIT:	mm	SIZE:	COLOR:	PART NAME: USB-A TYPE P.C.B(F)180'	
TOLERANCE UNSPECIFIED			DR:		
x	±0.3	CHK:		Nick	DWG NO: USB-002-03
xx	±0.20	APP:		Kent	
xxx	±0.100				REV: A0
ANG	±1°				SCALE: 3:1
				SHEET: 1 of 1	

