
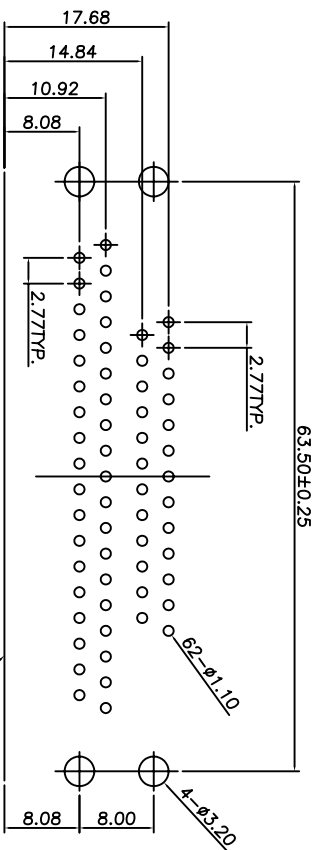
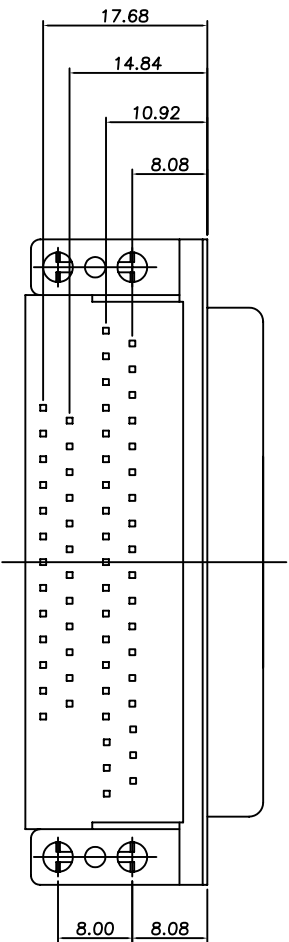


REVISION	DESCREPTION	DATE	APPD
0	SET UP	JUN/15/2007	C.Y.LIN

3009-28
(25 Male/37 Male)

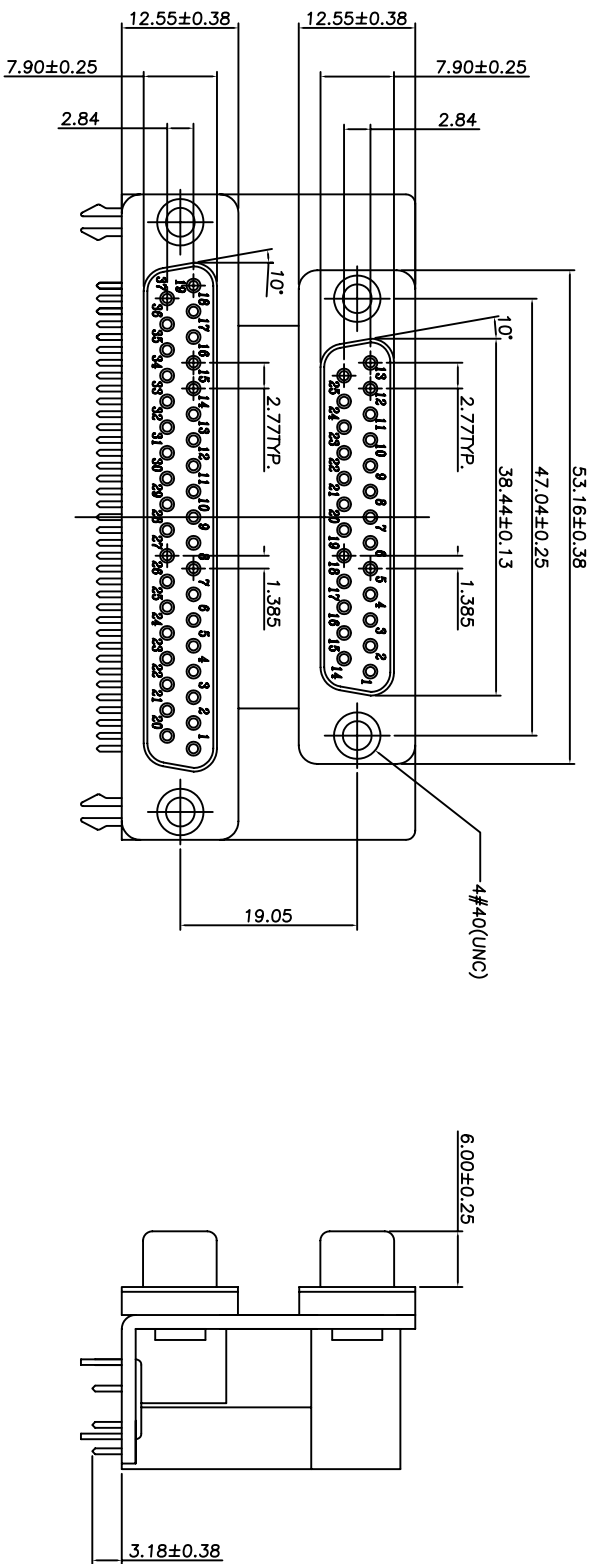

NOTES:

MECHANICAL CHARACTERISTICS:

INSERTION FORCE PER CONTACT: 341g MAX. CONTACT: BRASS.
SEPARATION FORCE PER CONTACT: 21g MIN. INSULATOR: PBT UL 94V-0 RATED.

MATERIAL:

SHELL: COLD ROLLER STEEL.

ELECTRICAL CHARACTERISTICS:

CONTACT CURRENT RATING: 3 AMPERES.
DIELECTRIC WITHSTANDING VOLTAGE: AC 1000V/60sec. r.m.s.
INSULATION RESISTANCE: 5000 MEGOHMS MIN. AT DC 500.
CONTACT RESISTANCE : 25 MILLIOHMS MAX.
OPERATING TEMPERATURE: -55 ~ +105 C.

ROHS COMPLIANT

Tolerance : ±0.2

UNIT : mm



HO CHIEN ENTERPRISE CO. LTD

TITLE :

DUAL PORT SERIES D-SUB PCB RIGHT ANGLE

PAGE :

1 OF 1

HO CHIEN P/N.

3009 -28