HO CHIEN P/N.
3009 -31(9F/HD 15F)

REVISION	DESCRECPTION	DATE	APPD
0	SET UP	MAR/05/2008	C.Y.LIN

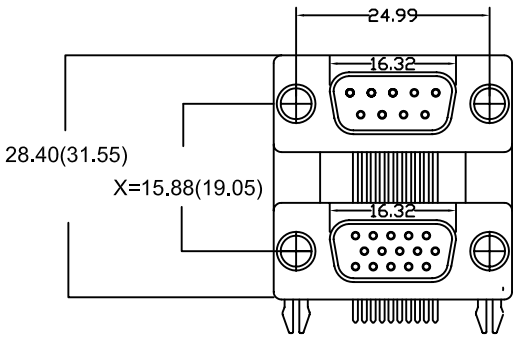



3009 - 31 □ □

TYPE (Top/Bottom)
31=9Female/HD 15Female
"X" SPACING
A=19.05mm
C=15.88mm
MOUNTING OPTIONS
Blank=Thread Insert, Mounting Holes
Z=Thread Insert, Board Lock
A=Thread Insert, # 4-40 Jack Screw assembly, Mounting Hole
AZ=Thread Insert, # 4-40 Jack Screw assembly, Board Lock
*Black color only





P.C.Board Layout

MATERIAL & ELECTRICAL
SHELL : Steel Tin plated
INSULATOR : PBT & Glass-fibre UL 94-V0
CONTACT : Phosphor bronze
PLATING : Gold-Plated Over Nickel
CURRENT RATING : 5 Amp
DIELECTRIC STRENGTH : 1000V for one minute.
INSULATOR RESISANCE : 1000MΩ Min. at 500V DC.
TEMPERATURE : -55°C ~ +105°C

RoHS COMPLIANT

UNIT : mm
TOLERANCE ± 0.15

HO CHIEN ENTERPRISE CO. LTD

TITLE :
DUAL PORT SERIES D-SUB PCB RIGHT ANGLE

DR :	CHK :	APPD :	PAGE:	HO CHIEN P/N.
RON CHEN	J.T.CHEN	C.Y.LIN	1 OF 1	3009 -31(9F/HD 15F)

HO CHIEN ENTERPRISE CO., LTD. TEL : 886 - 2 - 29953505 (5 LINES) FAX : 886 - 2 - 29953167 On - Line catalog: www.hochien.com EMAIL: hctw @ ms64.hinet.net