
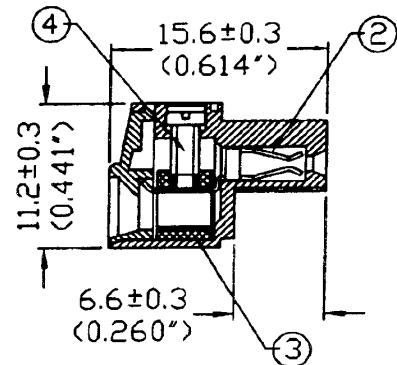
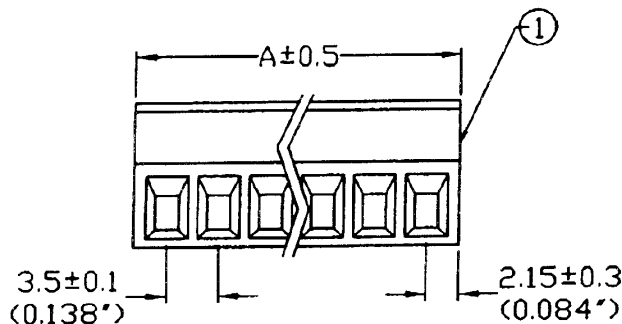


# HCMC420-350XX

□□ : Poles  
 350 : Pitch 3.50mm  
 420 : Standard  
 MC : Type



| Pitch: 3.50mm (0.136inch) |       |       |       |       |       |
|---------------------------|-------|-------|-------|-------|-------|
| Poles                     | A(mm) | A(in) | Poles | A(mm) | A(in) |
| 2                         | 7.00  | 0.307 | 15    | 53.30 | 2.099 |
| 3                         | 11.30 | 0.445 | 16    | 56.80 | 2.237 |
| 4                         | 14.80 | 0.583 | 17    |       |       |
| 5                         | 18.30 | 0.720 | 18    |       |       |
| 6                         | 21.80 | 0.858 | 19    |       |       |
| 7                         | 25.30 | 0.996 | 20    |       |       |
| 8                         | 28.80 | 1.134 | 21    |       |       |
| 9                         | 32.30 | 1.272 | 22    |       |       |
| 10                        | 35.80 | 1.409 | 23    |       |       |
| 11                        | 39.30 | 1.547 | 24    |       |       |
| 12                        | 42.80 | 1.685 | 25    |       |       |
| 13                        | 46.30 | 1.823 | 26    |       |       |
| 14                        | 49.80 | 1.961 | 27    |       |       |

Current rating : 10Amp AC300V

Insulation withstands volt : AC2000V min

Insulation resistance : >2000MΩ DC500V

Operation temperature : -40°C to +105°C

|   | Material        |                       | Plating/Finish | Remark |
|---|-----------------|-----------------------|----------------|--------|
| 1 | Insulating body | Polyamide 66(UL94V-0) |                | Green  |
| 2 | Contact         | Phosphor bronze       | Tin plated     |        |
| 3 | Cage clamp      | Brass                 | Ni plated      |        |
| 4 | Screw           | Steel                 | Ni plated      |        |

## HO CHIEN

[www.hochien.com](http://www.hochien.com)